FireBrand -

HIGH IMPACT AT A LOW COST

The FireBrand 28 derives its name from branding iron because of its simplicity and positive impression it leaves. The FireBrand 28 is a deep V hull platform. The flush fore deck with 18" wide walk-around side decks and flat deck above the cuddy provides forward work space outside and lots of storage inside. The cabin has a bench for passengers with integrated storage and a fold down navigator's seat to create a flat surface to accommodate a back board. The cuddy has dedicated EMS, fire equipment and SCBA storage. The 1250 GPM rated firefighting pump and gasoline pump engine are located in a pump engine box. The sea chest is integrated into the hull extension between the outboard motor brackets for easy access to the strainer for cleaning and inspection. The monitor is located on top of the cabin roof and is operated from a dedicated console within the cabin. Two 2.5" capped discharges are mounted in the cockpit. Twin gasoline outboards can propel the boat to speeds of 40 knots for fast emergency response. Rugged guards provide additional protection for the outboard engines. A hinged dive door with an integrated ladder provides easy access for diving crew deployment and patient recovery.

L.O.A.	33′5″
B.O.A.	10'6"
Draft	18"
Pump	1250 GPM
Discharges	1 monitor; 2 discharges
Propulsion	Twin outboards
Pump Engine	6 cylinder gas









MetalCraft Marine

www.metalcraftmarine.com



FIRE FIGHTING SYSTEMS

- Single Darley fire pump producing 1500 GPM
- Roof mounted, remote operated 1250
 GPM monitor
- 21/2" valved NST capped discharges
- All fire controls and gauges at dedicated console

EMS SUPPORT


- Heated patient care area with primary patient care berth
- Dedicated EMS equipment storage with AC outlet for chargers
- SCBA storage panel

ELECTRICAL SYSTEM

- Shore power 1×30 amp
- DC (12V) breakers 16
- AC (110V) breakers 3
- DC outlets 2
- AC outlets 2
- Corrosion meter
- Cabin, scene & spot lights
- NAV lights
- Battery charger

ELECTRONICS

- VHF
- GPS, radar, chart plotter w/depth
- Compass
- · Hailer/fog horn
- Siren/PA

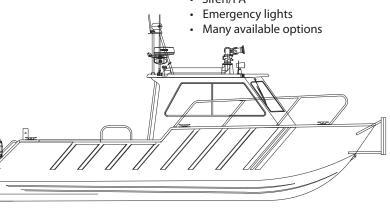

STANDARDS

- Meets NFPA 1925 pumping for Type 'V'
- · Meets OSHA Db rating
- USCG CFR 46
- · USCG interior flame retardant rating
- American Boat & Yacht Council
- American Bureau of Shipping Welding Standards

OTHER FEATURES

- · Chart table
- Crew seating
- Non skid 18" side decks
- Safety railings with harness brackets
- · Anchor locker
- Hinged dive door
- 4 watertight compartments
- Rubber sound matting
- Finished interior
- · Flat or tread plate aluminum decking
- Tinted side windows, clear windshields
- 2 multi-speed wipers
- 40,000 BTU cabin heater w/defrost
- · Hinged mast w/radar arch
- Push knee
- · Access to all piping and valves
- Deck hose storage lockers

